


BRONTO Skylift S34 MDT 'City Range'

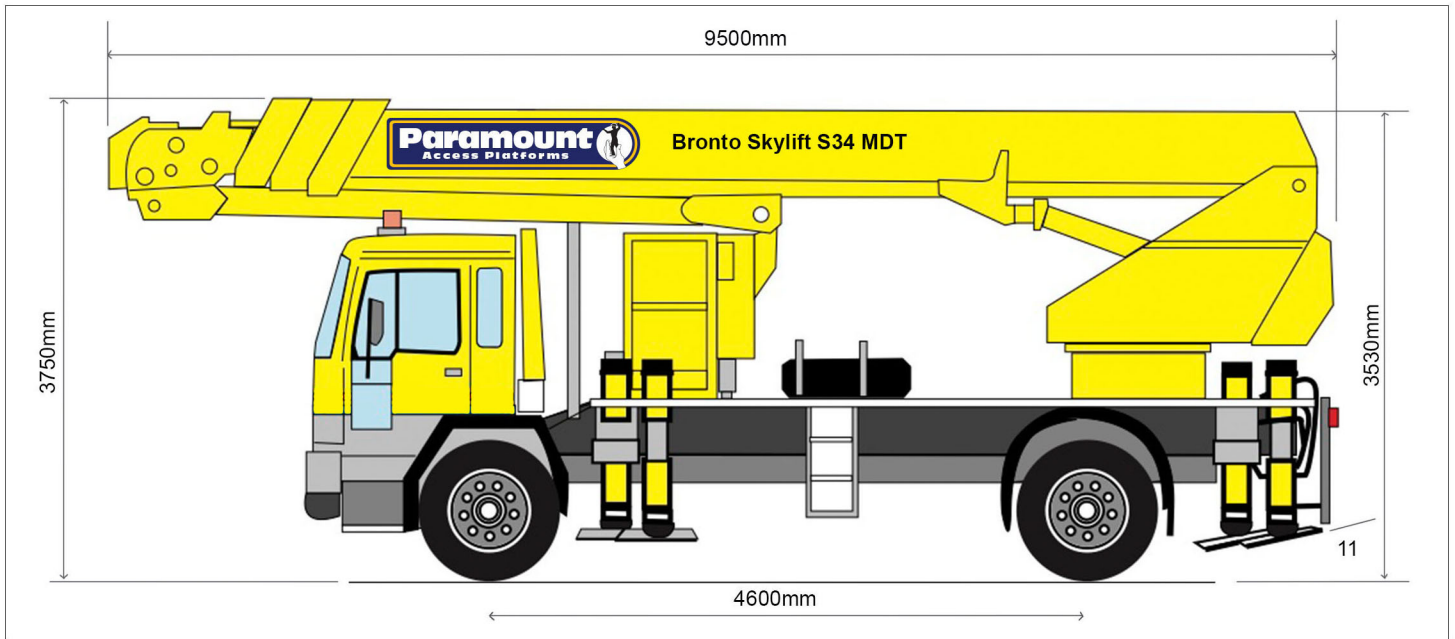


Additional Specifications:

Vehicle Width (Travelling): 2500mm

One-Sided Extension of Jacks: 1585mm from vehicle

Axle Weights: Front 7100kg, Rear 10500kg

Maximum Jack Loading at Full Outreach and 280kg: 11700kg

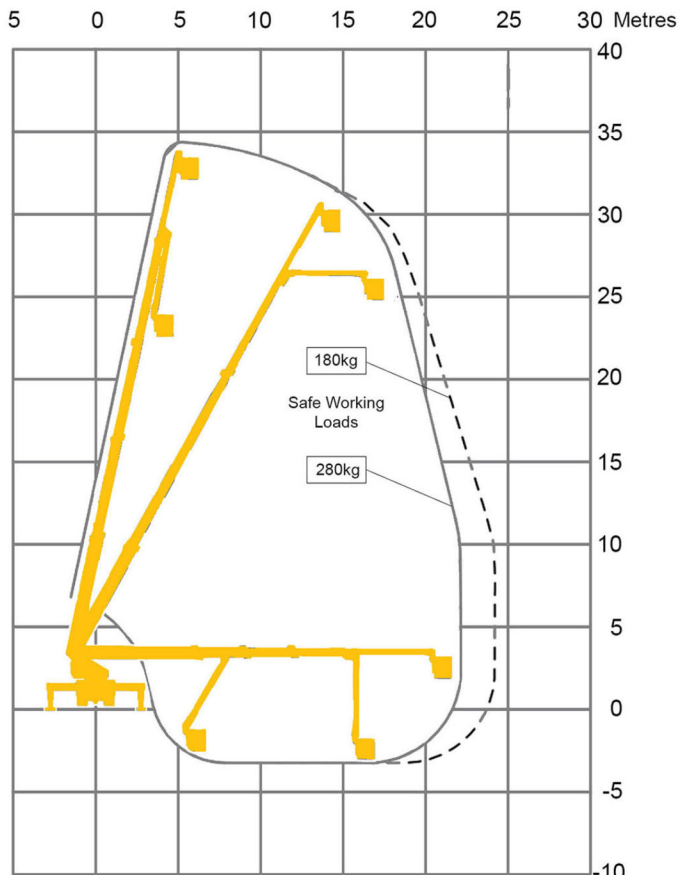

Technical Specification:

Max. working height	34m
Max. height to working cage bottom	32m
Max. side outreach/cage load	22m/280kg (3 persons + 40g) 24m/180kg (1 persons + 100kg)
Max. side outreach/cage load at narrow jacking	14m/180kg (1 person + 100kg)
Max. side force	400N
Max. outreach below the ground level	2,5m
Rotation	+/-280 deg
Dimensions of working cage	1,0 x 1,8 x 1,1m (lxwxh)
Transport height	3,8m
Transport length	9,5m
Transport width	2,5m
Max. outrigger width	5,6m
Max. outrigger width at narrow jacking	2,6m
Skylift weight without truck chassis	10,2ton
Total weight	16,9ton
Max. outrigger force	130kN
Max. footplate pressure	6,1kg/cm2
Max. footplate pressure with plywood groundplate (50x650x750)	2,5kg/cm2
Operating Temperature range	-25C+40C
Noise level	<85dB
Max. wind speed	12,5m/s