




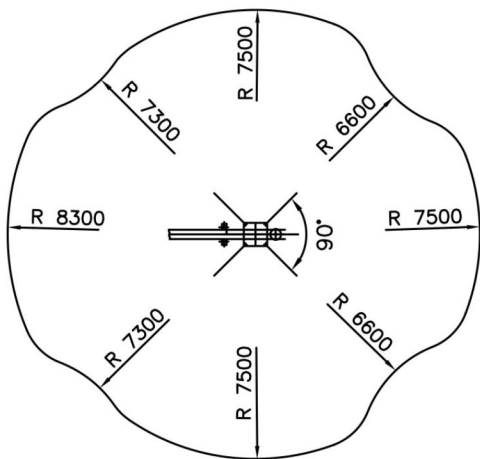

Outreach from center turret to center basket in standard position.

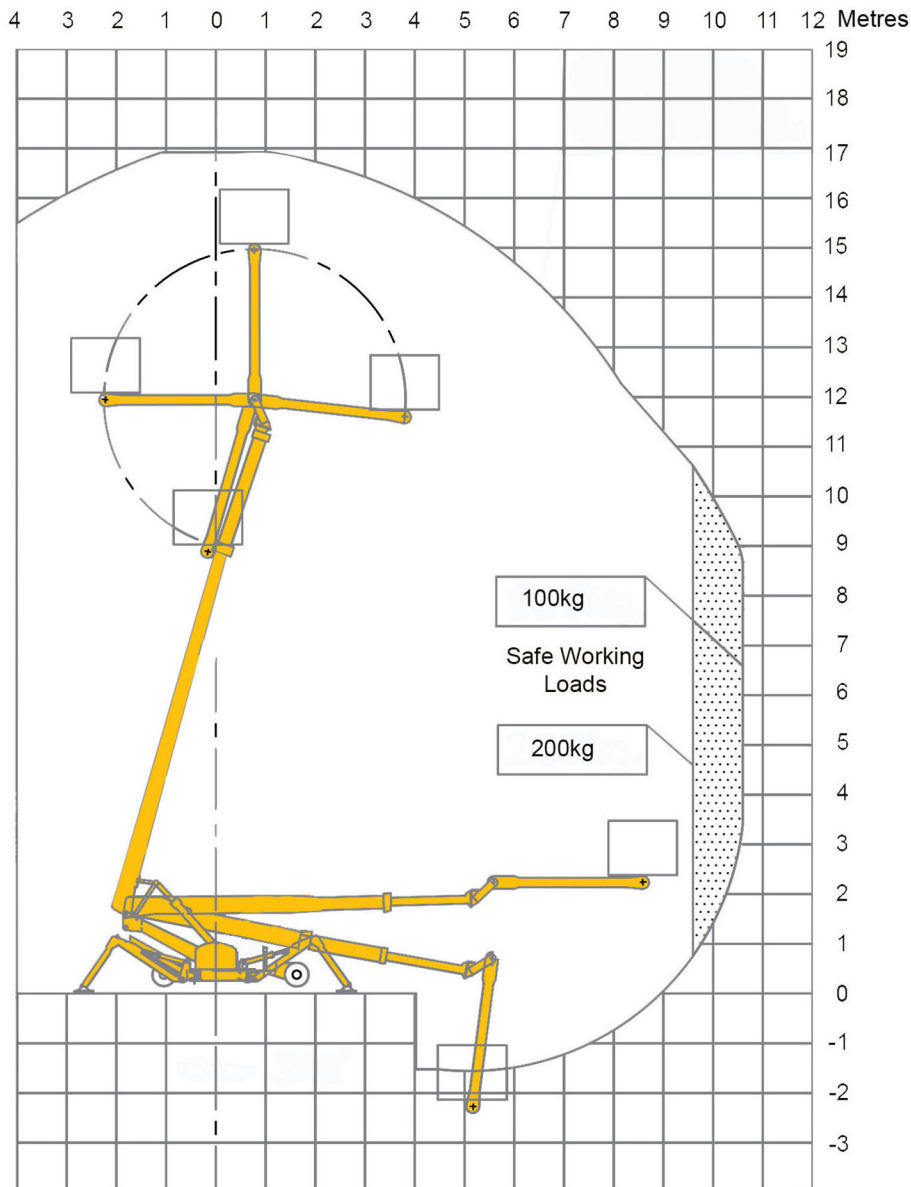


Maximum outreach with 100kg. within this zone depending on leg position.




Maximum outreach with 200kg. within this zone depending on leg position.




Additional working height with legs fully extended.

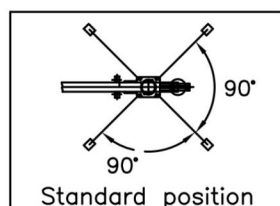


We reserve the right to make alternations.

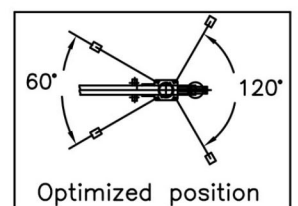


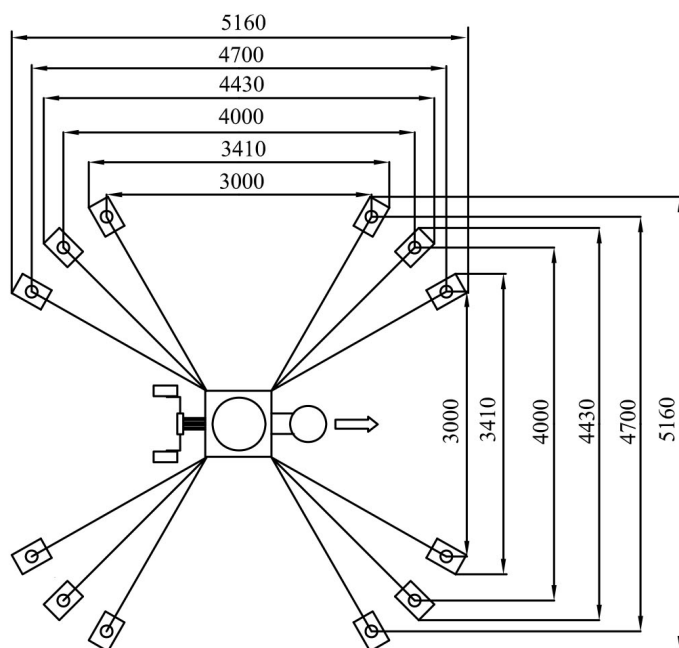




Measurement (when undercarriage is not elevated)

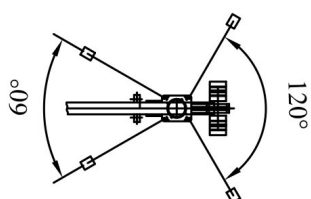

Optimized position



Standard position

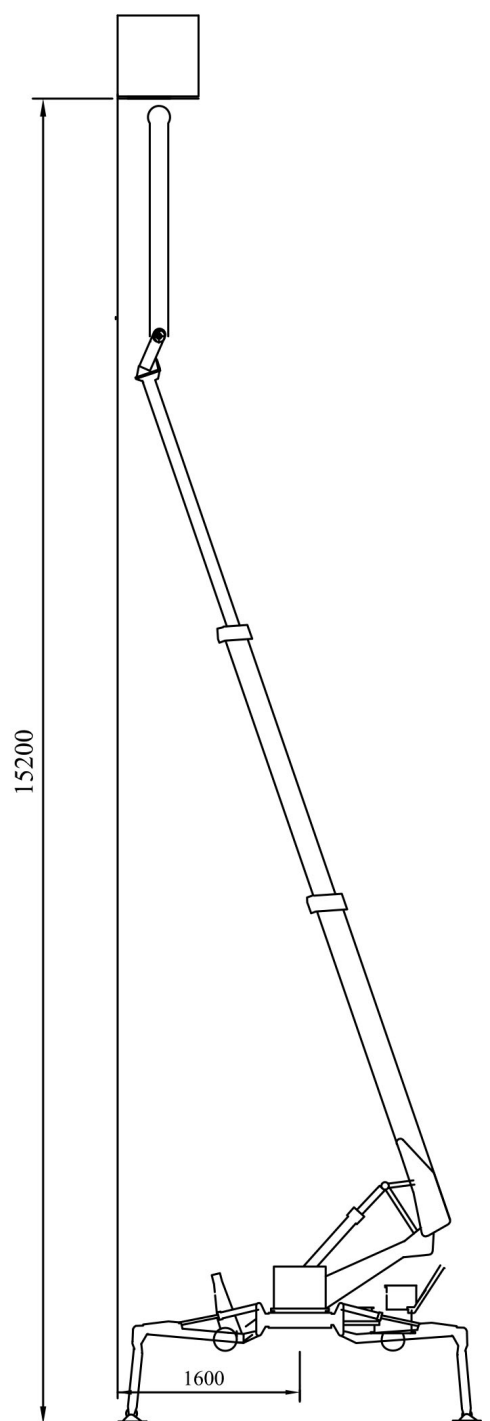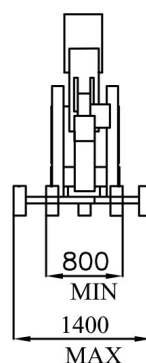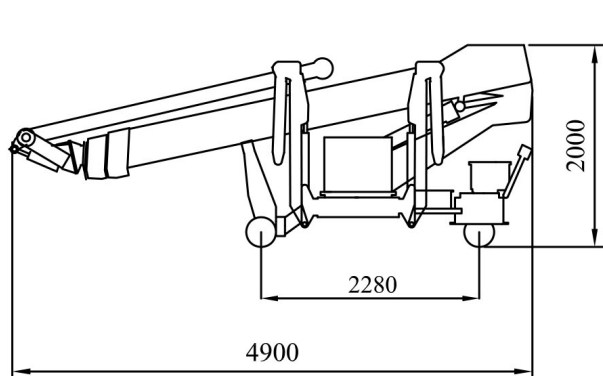

Weight standard equipment _____ 2400kg.

Max weight under wheels _____ 3,75kg./cm²

Max surface pressure under 1 outrigger plate _____ 1,50kg./cm²