




Technical Data:		18.00 RXBJ	18.00 RXBDJ
Max. working height			17.8 m
Max. platform height			15.8 m
Max. outreach			10.0 m
Up and over clearance			6.0 m
Angle boom length (boom + basket)			-
Jib length (jib + basket)			2.7 m
Vertical jib rotation			90°
Turret rotation			± 355°
Basket rotation			± 41°
Max. basket load			230 kg
Basket size (detachable)			1.40 x 0.7 x 1.1 m
Stabilizer pad size			ø160 mm / ø120 mm
	⁶ Diesel	BATTERY	⁶ HYBRID
Engine			9.9kW/13.3hp
Fuel tank capacity			15 l
Generator			24 V / 22 A
Battery pack		24V/400Ah/5h	24V/200Ah/5h
Charger		24 V / 30 A	24 V / 30 A
Double charger system		Standard	Optional
Elec. descent from basket			
See www.ommelift.com for more features and options			
Gradeability, max. across slope			¹ Wide 30% (16.7°)
Gradeability, max. up and down slope			30% (16.7°)
Set-up ability on uneven ground			21% (12.0°)
Crawler track length			1.42 m
¹ Undercarriage in Wide ² Undercarriage in Narrow ³ Wide set-up ⁴ Wide/Narrow set-up			
Total weight		2980 kg	2900 kg
¹ Live load in transit position		455 kg/m²	443 kg/m²
² Live load in transit position		680 kg/m²	661 kg/m²
³ Live load in working position		264 kg/m²	258 kg/m²
⁴ Live load in working position		1 position only	1 position only
Ground pressure, tracks (Hard surface)		0.61 kg/cm² (2.40 kg/cm²)	0.59 kg/cm² (2.30 kg/cm²)
Ground pressure, outrigger pad		20.1 kg/cm²	20.1 kg/cm²
Max. force, outrigger		17.1 kN	17.1 kN

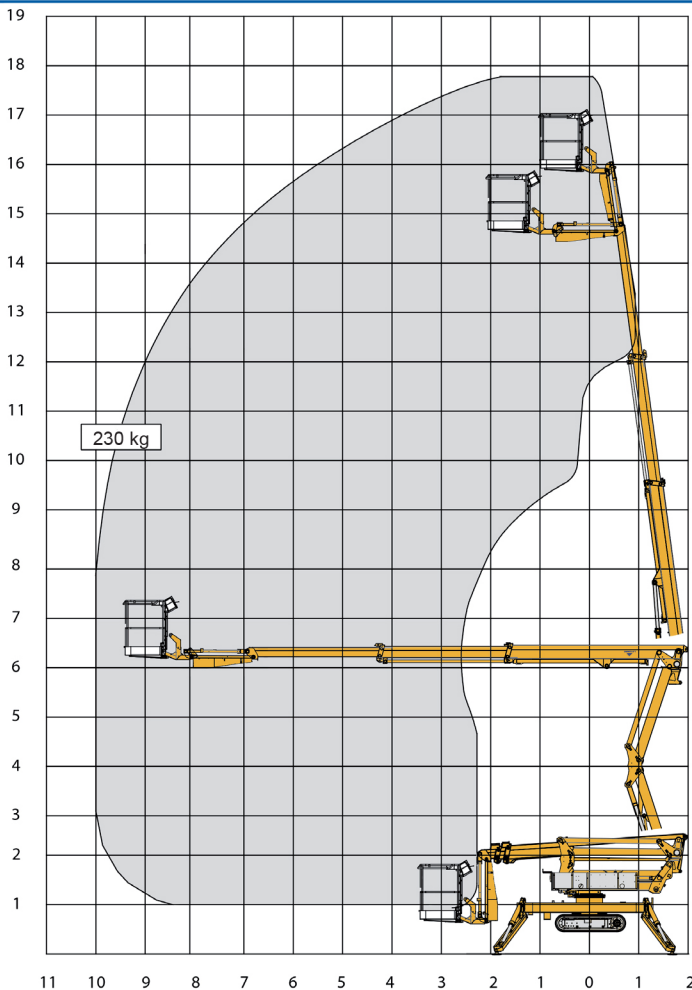